


HAND DRYER

USER MANUAL

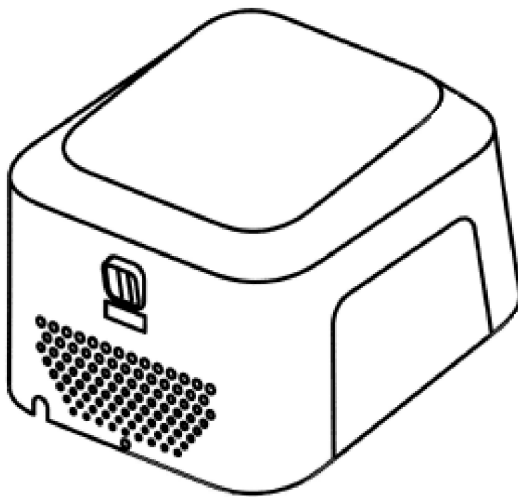

Technical Parameters

Voltage	220V	Motor Type	series motor
Input	1350W	Sensing Distance	9-15cm
Wind Speed	75M/S	Appearance Size	278x245x163mm
Heating Power	800W	N.W	3.8KG



WARNING

If you don't use this unit properly or follow the safety guidelines carefully, it would lead to serious personal injury or property damage



Prohibition

- Do not open the front panel.
Otherwise, this may get an electric shock.



Do not allow the unit get wet

- Do not allow the unit get wet,
Otherwise, it will cause electric shock.



Do not use at bathtub or shower room

- Do not use in a wet environment, for example, near the bathroom where it may get the direct water and the places where the condensation may fogging. Otherwise, this may cause electric shock and unit malfunction.



Prohibit Disassembling

- Do not modify and disassemble the unit unnecessarily.
Otherwise, this may cause a fire, electric shock, or personal injury.



Please do complying with instruction

- 220-230v,50Hz or 110-120V 60Hz is required.
- If power tolerance is over +/-10%, there will be breakdown. If using incorrect power supply, it may cause fire, electric shock and machine malfunction.
- Pls using dedicated socket. If using together with other appliances, the socket may cause abnormal heat leading to fire.
- Power must be cut of when maintenance to prevent the risk of electric shock.
- Must be Installed by similarly qualified persons. It may cause electric shock or fire.
- Must install residual current circuit-breaker. Otherwise, it may cause electric shock.



Prohibition

- Do not put things on the machine.




Please do
complying with
instruction

- If the machine doesn't work or have abnormal conditions, please cut off power to prevent accidents; and close leakage circuit breaker and ask supplier to check and repair. Or it may lead to fire because of electricity leakage and short circuit.
- ▲ Attention when installation:
 - Do not install when the machine is power connected.
 - Must be Installed by similarly qualified persons, and on the wall which is hard enough. Otherwise, it may cause damage by dropping.
 - Must install residual current circuit-breaker. Otherwise, it may cause electric shock.

Feature


- No touch hand drying ensures complete hygiene.
- No need paper towel, no waste.
- Antibacterial environmental material, No Pollution.
- Self-protection function: When working last over 50s, it will stop until induct again.
- It is with automatic heating function: When temperature below $25^{\circ}\text{C} \pm 2^{\circ}\text{C}$, it will blow hot wind.

Name of each part

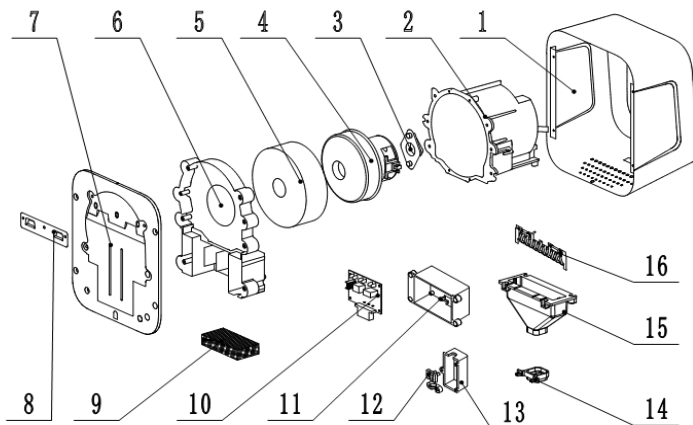

- | | |
|---------------------------------|-----------------------------------|
| 1.304 Stainless Steel Cover | 9.HEAP Fitter |
| 2.Motor Housing | 10.PCB |
| 3.Motor Shock block | 11.PCB Cover |
| 4.Motor | 12.Power Terminal |
| 5.Motor Shock Absorber | 13.Terminal Cover |
| 6.Motor Housing Bracket & Inlet | 14.Illuminator Outlet |
| 7.Metal Base | 15.Heating Element Cover & Outlet |
| 8.Mounting Plate | 16. Heating Element |

Electrical Schematic Diagram

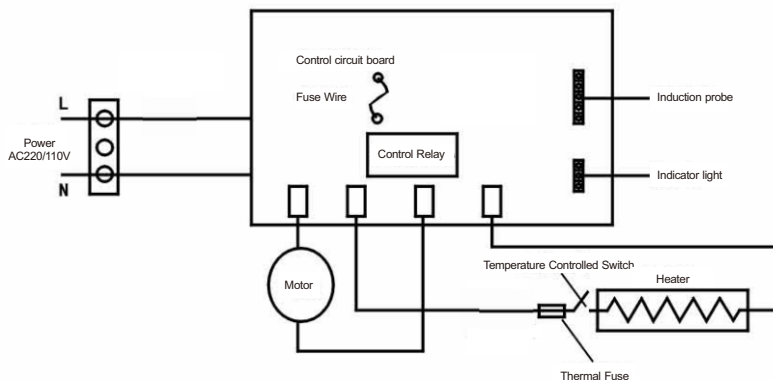


■ Do not install in the following places (otherwise may cause malfunction)

Install Method

1

Connect the line


- When installing dryer without junction box, you should install above the right side of dryer two-hole standard outlet corresponds to hand dryer.
- Please embed Junction box without cover in the installation location when directly connecting power cord is needed. Other wise power cord will be forced out of body and can not be properly installed.

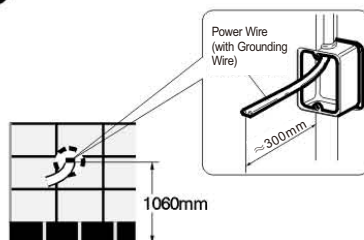

2

Install steel plate


- Install the steel plate as showed in picture
 - The down most expansion screw install to a plastic cable
 - As right picture showed, pull out the power cord and connect with dryer's power cord.
- ❗ When connecting, live line with brown color cord, zero line with blue, grounding wire with yellow & green; Then bind with insulating tape, no leakage.



3


Install dryer

Eyes on the steel plate, and hang the dryer on it.



4

As picture showed, there is a retaining screw in the middle. Tighten the screw clockwise by $\Phi 5$ screwdriver, till the dryer fixed without shaking.

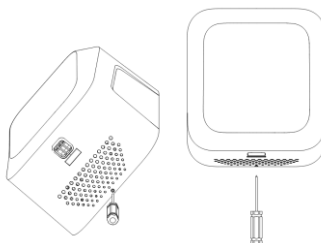

Test Run

	Steps	Confirm Information	Check & Notice
1	Shack the machine gently	The machine is stalled firmly without shaking	It will occur shaking and noisy when the machine doesn't install firmly
2	Confirm the power and voltage	Please use the rated power supply	It will burn out machines or cause human accidents if the power use incorrect
3	Switch on the power	Close external power supply switch or insert the power plugs	Power socket must be match the machine plug
3	Slid in your hand to drying	High speed wind blow out (try after 10s when connect the power)	Please check whether your hands are beyond the sensing distance if no wind blowing out

Daily use and maintenance

1

External maintenance

- Scrub with a soft dry cloth or towel.
If the machine is too dirty, please use neutral detergent, and wipe it with dry cloth.
When cleaning the sensor parts, turn off the power in advance.

❗ **Please use neutral detergent**
Please don't use organic solvents, acid or alkali toilet cleaner, cleaning brush etc. Otherwise, the machine will destroy machine surface finish or produce discoloration.

❗ **Do not clean surface with alcohol**
If using a chemical cloth, make sure that the use of attention .



Packing list

Main machine-----	1	User manual-----	1
5x30mm self tapping screw---	5	Usage diagram-----	1
5mm expansion pipe-----	5		

